

Grid Depth

Reinforced Soil

Unreinforced Concrete

or Crushed Stone


Leveling Pad

Retained Soil


Approximate Limits

4" Perforated PVC Drainage Tile

Copyright 2010 Keystone Retaining Wall Systems

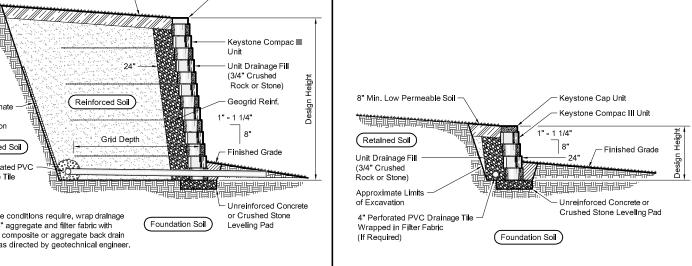


Keystone Cap Unit

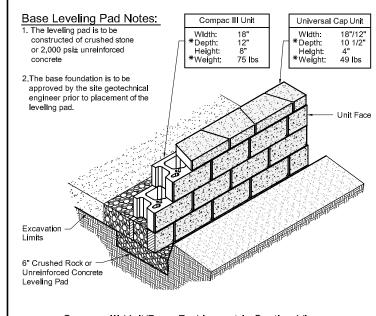


Compac III Unit/Base Pad Isometric Section View


\* Dimensions & Weight May Vary by Region

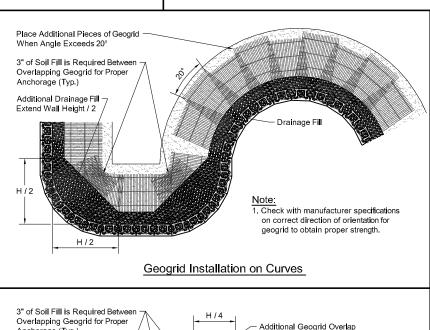

Typical Gravity Wall Section

Compac III Unit - 1" Setback

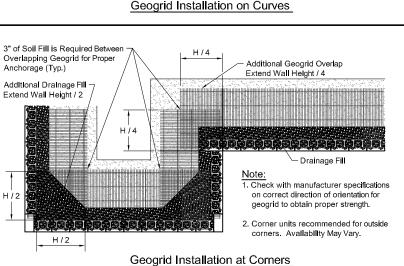

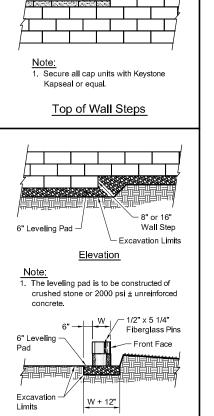

Section

Leveling Pad Detail


4" Cap Unit

Unit

8" Keystone

(2) - 4" Cap Units or

(1) - 8" Cap Unit

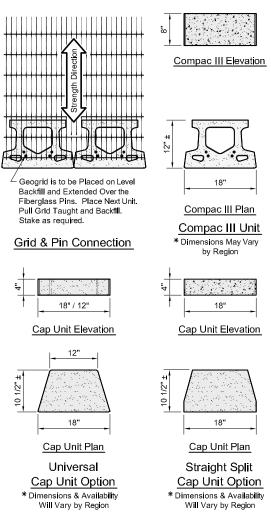



(Foundation Soil)

Grid Depth

- Finished Grade

24" -


Design is for internal stability of the KEYSTONE wall structure only. External stability, including but not limited to foundation and slope stability is the responsibility of the Owner. The design is based on the assumption that the materials within the retained mass, methods of construction, and quality of materials conform to KEYSTONE's specification for this project.

When site conditions require, wrap drainage

drainage composite or aggregate back drain

tile in 3/4" aggregate and filter fabric with

This drawing is being furnished for this specific project only. Any party accepting this document does so in confidence and agrees that it shall not be duplicated in whole or in part, nor disclosed to others without the consent of Keystone Retaining Wall Systems, Inc.



8" Min. Low Permeable Soil

Keystone Cap Unit

Keystone Compac III Unit

Unit Drainage Fill (3/4"

Crushed Rock or Stone)

Unreinforced Concrete

or Crushed Stone

Leveling Pad

Geogrid Reinf.

Finished Grade

1/8" - 1/4"



Designed By: RKM	Compac III Unit - Straight Face Details	Date:
Checked By:	Project:	Project No:
CDM	Keystone Retaining Wall Systems	
Scale:	Typical Wall Details	Drawing No:
No Scale	. ,,	J